


Eggbox-vana 30 Pu-vana 30



Application

Designed to improve the sound insulation in motor vehicles, vessels, compressors and all kinds of machines. VTT type-examination certification no. VAL 442/1B2/03.

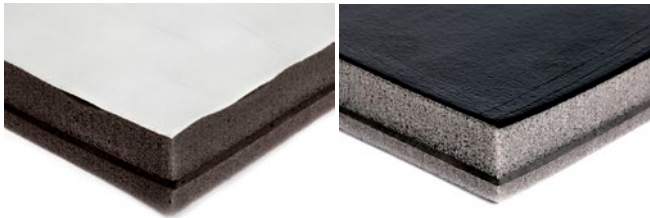

Flammability


The product meets the requirements of the recreational craft directive 94/25/EC and the requirements of EN ISO 9094-1:2003, RSD Guidelines, ISO 4589, ISO 3795 and FMVSS 302, meaning that the product is self-extinguishing. The product can therefore be used as sound insulation in vehicles and engine compartments of CE approved recreational crafts.



Mean Sound Reduction Index

40 dB (attached to 6 mm glassfiber).

Physical Properties

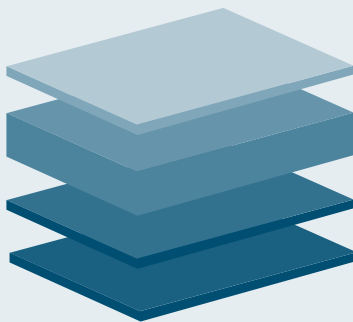

- 1 **Surface** Polyurethane (PU)
- 2 **Absorption layer** Polyether foam 27 kg/m³
- 3 **Sound barrier** Mineral loaded polymer mass
- 4 **Distance layer** Polyether foam 27 kg/m³

Nominal thickness

Ca 30 mm


Weight

8 kg/m²

Delivery

In rolls 1x25 m, of which smaller pieces or forms can be cut.

Mean Sound Reduction Index

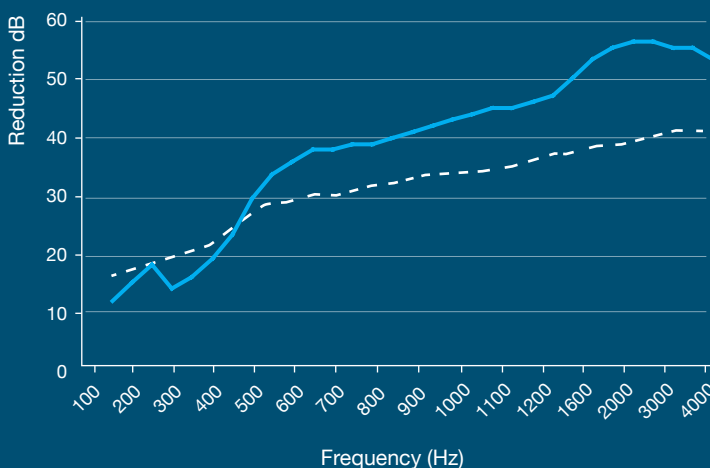

An effective layered sound insulator that will also block low frequencies.

40 dB Mean Sound Reduction Index

--- Eggbox-vana 30 / PU-vana 30

— Eggbox-vana 30 / PU-vana 30 + 6 mm glassfiber

Oy Meluton Ab

Vantaanpuistontie 31, 01730 Vantaa, Finland
www.meluton.fi | E-mail: info@meluton.fi | Phone: +358 207 401360

