


# CR rubber

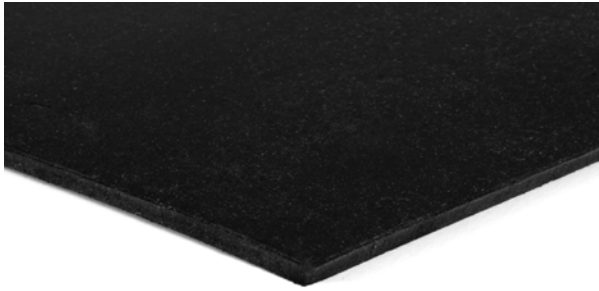

## Application

Rubber sheets for multiple applications.

Suitable for e.g. gaskets and vibration damping.

## Physical Properties

- Synthetic CR rubber (chloroprene, neoprene) with better oil resistance than natural rubber
- Ozone and weather resistant
- Suitable for gaskets and vibration damping

**Hardness** 65 +/-5 ShA

**Density** 1.40 g/cm<sup>3</sup>

**Temperature range** -25...+70°C

**Thickness** 1–20 mm

**Max. width** 1,400 mm

**Max. length** 5-20 m (depending on the thickness)

**Delivery** In rolls, sheets or cut to form pieces.

Rubber sheets for multiple applications.  
Ozone and weather resistant.

## Oy Meluton Ab

Vantaanpuistontie 31, 01730 Vantaa, Finland  
www.meluton.fi | E-mail: info@meluton.fi | Phone: +358 207 401360

