


SBR rubber

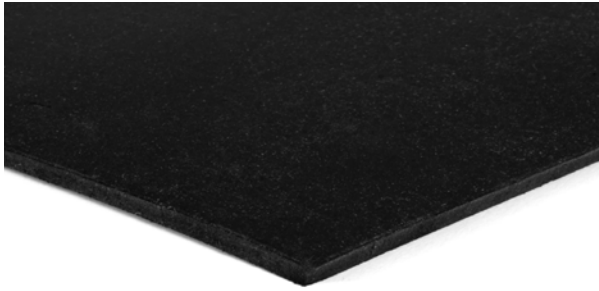

Application

Rubber sheets for multiple applications.

Suitable for e.g. gaskets and vibration damping.

Physical Properties

- Extremely elastic/flexible
- Good resilience
- Good resistance to abrasive wear
- Good resistance to cold
- Good resistance to ageing

Hardness 70 \pm 5 Shore A

Density 1.50 g/cm³

Working temperature -20...+70°C

Thicknesses 1–20 mm

Max. width 1,400 mm

Max. length 5–20 m (depending on the thickness)

Delivery In rolls, sheets or cut to form pieces.

Rubber sheets for multiple applications.
Good resistance to abrasive wear.

Oy Meluton Ab

Vantaanpuistontie 31, 01730 Vantaa, Finland
www.meluton.fi | E-mail: info@meluton.fi | Phone: +358 207 401360

